





state customized  
 OF THE ART  
**CK3003** PRECISION *highest*  
 QUALITY

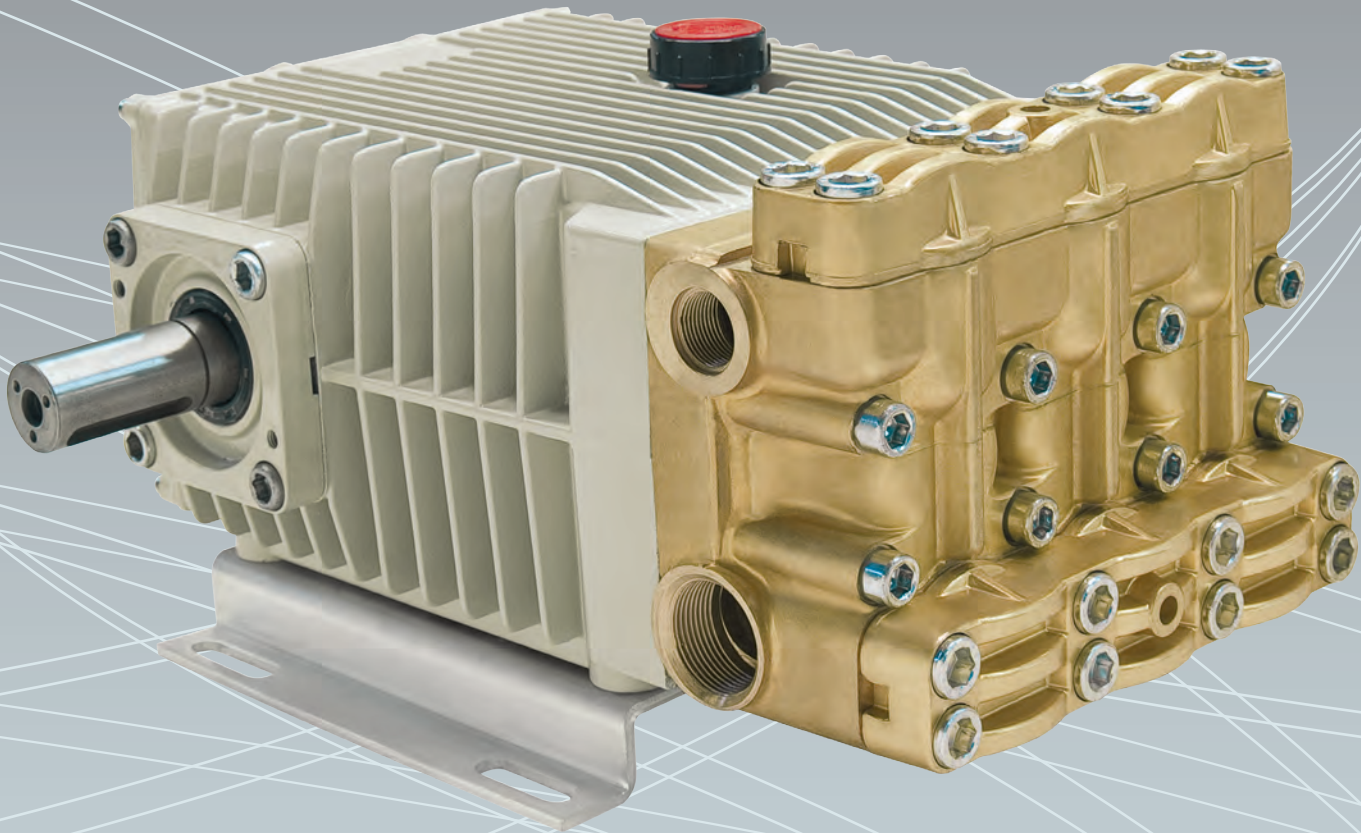

**CARATTERISTICHE - SPECIFICATIONS**

<b>IN</b>	<b>DIAMETER</b>	∅	1" 1/4 BSP
	<b>PRESS.</b>	Min.	-0.2 bar - 3 PSI
		Max.	6 bar 87 PSI
<b>TEMP.</b>	Max.	60° C. 140° F.	
<b>OUT</b>	<b>DIAMETER</b>	∅	3/4 BSP
<b>SHAFT</b>		∅	35 mm
<b>OIL</b>		SAE 75W90	2.8 litri 0.74 U.S.G.
<b>PESO WEIGHT</b>		Kg / lbs	52 / 114.4

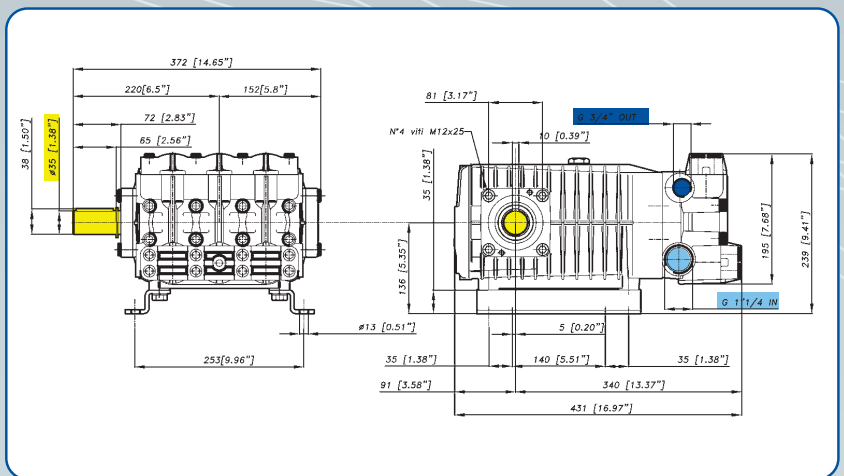

OPTIONAL **Sx Bz B M** CK1203: **V**

**Dx INTELLiseal H.W.™**

customized highest state  
highest PRECISION OF THE QUART  
CK3003



**CK 2203**

CARATTERISTICHE - FEATURES				PERFORMANCE CHART														
MODELLO MODEL CODICE CODE	MAX		PRESS		RPM 1000				RPM 1450				RPM 1725				PIST. CORSA PLUNG. STROKE	
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	KW	HP	Dia. mm	mm
CK 2216 73.8510.97.3	70	18.5	100	1450	45	11.9	8.9	11.9	63	16.6	12.3	16.5	70	18.5	13.7	18.4	30	22
			125	1813	45	11.9	11.0	14.8	63	16.5	15.3	20.6	70	18.4	17.1	22.9		
			150	2175	45	11.8	13.2	17.7	62	16.4	18.3	24.6	69	18.3	20.4	27.3		
CK 2220 73.8506.97.3	80	21.2	100	1450	58	15.2	11.3	15.2	80	21.1	15.7	21.1	N.D.	N.A.	30	28		
			125	1813	57	15.1	14.1	18.8	80	21.0	19.5	26.2						
			150	2175	57	15.1	16.8	22.5	79	20.9	23.3	31.3						
CKL 2226 73.8616.97.3	97	25.7	100	1450	70	18.5	13.7	18.4	97	25.7	19.1	25.6	N.D.	N.A.	30	34		
			125	1813	70	18.4	17.1	22.9	97	25.5	23.7	31.8						
			150	2175	69	18.3	20.4	27.3	96	25.4	28.3	38.0						
CKL 2230 73.8617.97.3	114	30.2	100	1450	82	21.7	16.1	21.6	114	30.2	22.4	30.1	N.D.	N.A.	30	40		
			125	1813	82	21.6	20.1	26.9	114	30.0	27.9	37.4						
			150	2175	81	21.5	24.0	32.1	113	29.9	33.3	44.7						
CKL 2233 73.8618.97.3	126	33.2	100	1450	90	23.9	17.8	23.8	126	33.2	24.7	33.1	N.D.	N.A.	30	44		
			125	1813	90	23.8	22.1	29.6	125	33.0	30.7	41.2						
			150	2175	90	23.7	26.4	35.4	124	32.9	36.6	49.1						

**CK 1203**

CARATTERISTICHE - FEATURES				PERFORMANCE CHART														
MODELLO MODEL CODICE CODE	MAX		PRESS		RPM 550				RPM 750				RPM 1000				PIST. CORSA PLUNG. STROKE	
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	KW	HP	Dia. mm	mm
CK 1224 73.8500.97.3	101	26.6	50	725	56	14.8	5.5	7.4	76	20.2	7.5	10.0	101	26.6	9.9	13.3	45	22
			65	943	56	14.7	7.1	9.5	76	20.1	9.7	13.0	100	26.5	12.8	17.1		
			80	1160	55	14.6	8.7	11.7	76	20.0	11.9	15.9	100	26.3	15.7	21.0		
CK 1229 73.8501.97.3	127	33.5	50	725	71	18.8	7.0	9.4	97	25.7	9.5	12.8	127	33.5	12.4	16.7	45	28
			65	943	71	18.7	9.0	12.1	97	25.5	12.3	16.5	126	33.3	16.1	21.6		
			80	1160	71	18.6	11.1	14.9	96	25.4	15.1	20.3	126	33.2	19.7	26.4		
CK 1235 73.8502.97.3	151	39.8	50	725	86	22.8	8.5	11.4	117	30.8	11.5	15.4	151	39.8	14.8	19.8	45	34
			65	943	86	22.7	11.0	14.7	116	30.7	14.8	19.9	150	39.6	19.1	25.7		
			80	1160	86	22.6	13.4	18.0	116	30.5	18.1	24.3	149	39.4	23.4	31.4		